

TS2100 Tripod Turnstile



TS2100 tripod turnstile series is a compact and cost-effective entrance control system designed for high-traffic volume.




TS2100 is a single-lane tripod turnstile series designed for smooth and silent operation and draws very little power. It's made of stainless steel which makes TS2100 highly durable. TS2100 is also surprisingly compact and designed to operate in small workspaces.

TS2100 tripod arms are normally held in a locked position, thus denying access to the secured side. Upon TS2100's reader (RFID and/or fingerprint) positively recognizing a user's valid access card or fingerprint, its tripod arms unlock, thus allowing users passage to the secured side.

Option for built-in REX button allows users to conveniently exit the secured side without needing to use their access card or fingerprint.

During emergencies and power outages the tripod arms completely collapse, thereby ensuring users FAST unencumbered exit to safety.


TS2100 provides both security and convenience, all in a very durable compact design.



Reliability, Safety and Integration

- Alloy steel tripod hub and SUS304 stainless steel case work & tripod arms ensure long-long-lasting durability.
- Power conservation. Electro-magnetic locks remain in "standby mode" until turnstile is activated
- Patented oil lubrication system reduces need for maintenance
- High quality electrical components
- Tripod-arms unlock & drop during emergencies / power loss
- All smooth finish. No exposed screws or fasteners
- Visual indicator for access granted (or denied)
- Ergonomic design makes card and fingerprint authentication fast & simple for users.
- Secure. Supports Anti-tailgating.
- TS2100 series ships already integrated with our customers' preference for either card or fingerprint access control reader. This greatly reduces installation time & expense.
- TS2100 series and associated access control readers are all factory-tested prior to shipping.

Dimensions (mm)

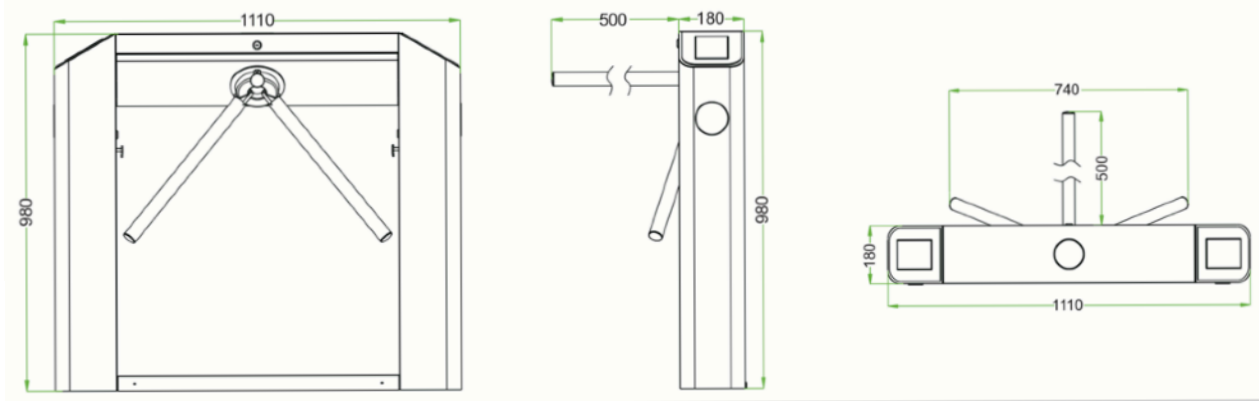

Specifications

Power requirements		AC110V/220V, 50/60Hz
Power Consumption	Starting	73W
	Standby	20W
	Unlock	63W
Working Temperature		-28 °C - 60 °C
Working Humidity		5%-80%
Working Environment		indoor/Outdoor(if sheltered)
Speed of throughput	RFID	Maximum 32/minute
	Fingerprint	Maximum 28/minute
	Face	Maximum 13/minute
	Vein	Maximum 19/minute
Lane width(mm)		500
Footprint(mm*mm)		1110*680
Dimension(mm)		L=1100, W=180, H=980
Dimension with packing(mm)		L=1200, W=280, H=1080
Net weight(kg)		45
Weight with packing(kg)		53
LED indicator		Y
Cabinet material		SUS304 Stainless Steel
Lid material		SUS304 Stainless Steel
Barrier material		SUS304 Stainless Steel
Barrier Movement		Rotating
Emergency mode		Y
Security level		Medium
MCBF		1 million
Options/Accessories		Counter, Card Receiver Box, SUS316 Cabinet and Lid, Remote Control