

S-4232D Wifi Connection Manual

1) Turn on android wifi and search for the printer wifi. Please direct connect the printer wifi. Ref Fig 01

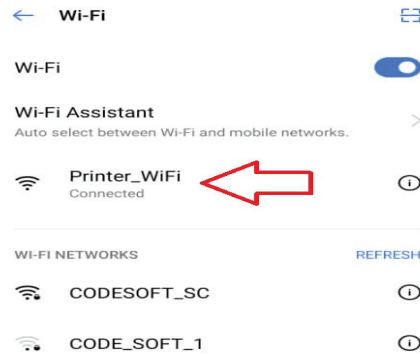


Fig 01

2) On Explorer address bar, Please type 192.168.0.1. Press enter. Ref Fig 02



Fig 02

3) When log in page prompt out, please type admin on username and password. Click Sign in. Ref Fig 03

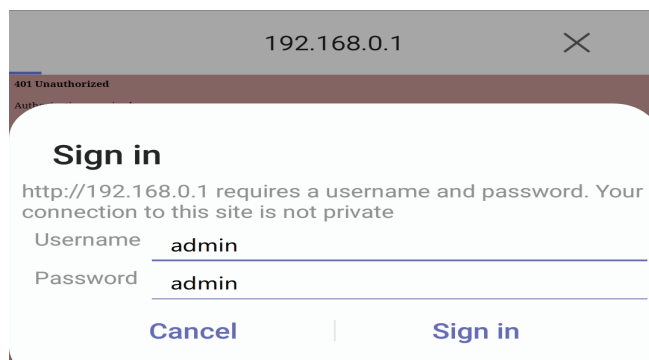


Fig 03

4) On Setting - UP Interface Setting not necessary to change. Ref Fig 04

192.168.0.1/home.html

AP Interface Setting

AP Interface Setting such as SSID, Security...

Wireless Network	
Network Mode	11b/g/n mixed mode
Network Name(SSID)	Printer_WiFi
BSSID	34EAE700C360
Frequency (Channel)	2412MHz(channel 1)
Wireless Distribution System(WDS)	WDS Configuration
Apply Cancel	
Printer_WiFi	
Security Mode	Disable
Apply Cancel	
LAN Setup	
IP Address(Default DHCP Gateway)	192.168.0.1
Subnet Mask	255.255.255.0
DHCP Type	Server
Apply Cancel	

Fig 04

5.1) On STA Interface Setting. This setting is refer to the router setting. Ref Fig 05

5.2) Type in SSID name.

5.3) Security Mode <-- Refer to router setting. (same setting with router)

5.4) Encryption Type <-- Refer to router setting.(same setting with router)

Pass Phrase : type pass key for enter network.

5.5) Please give fixed IP to the printer.

5.6) Once done setting click Apply.

192.168.0.1/home.html

STA Interface Setting

You could configure STA interface parameters here.

STA Interface Parameters	
AP's SSID	CODE_SOFT_1
MAC Address (Optional)	
Security Mode	WPA2PSK
Encryption Type	AES
Pass Phrase	XXXXXXXX
Apply Cancel	

WAN Connection Type: STATIC(fixed IP)	
Static Mode	
IP Address	192.168.1.88
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1
DNS	8.8.4.4
Apply Cancel	

Prev. Next Done

☐ OPEN

☐ SHARED

☐ WPAPSK

☒ WPA2PSK

Prev. Next Done

☐ TKIP

☒ AES

Fig 05

- 6) Device management . Ref Fig 06
This setting is for the administrator account.
For advice, Please do no change.

① 192.168.0.1/home.html

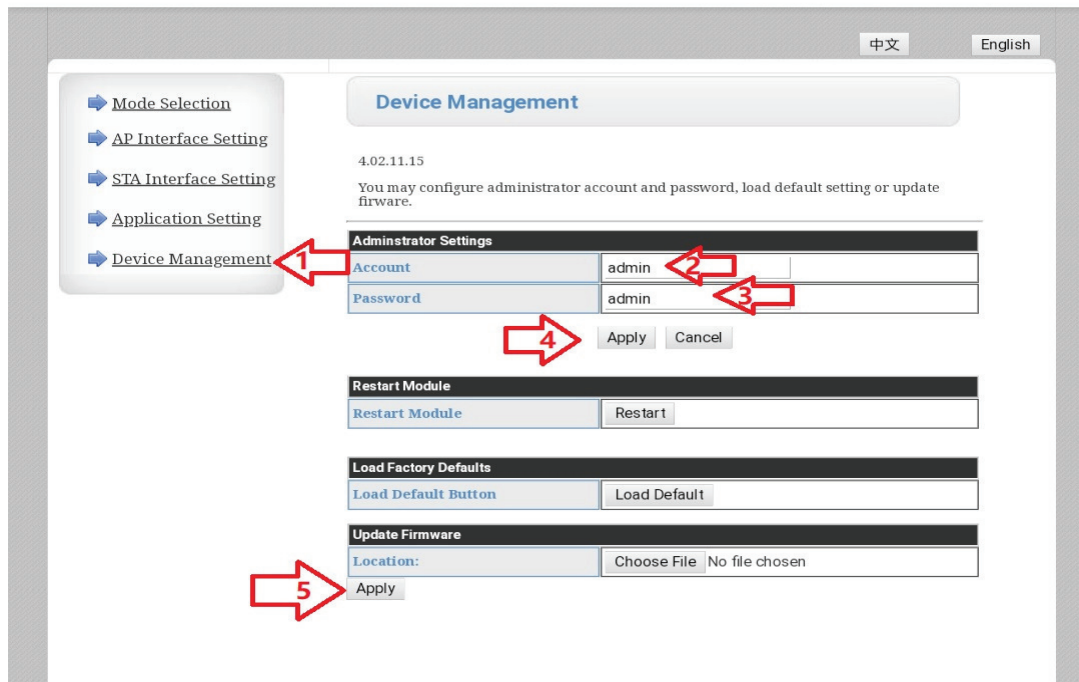


Fig 06

Self test

- 1) Turn off power
- 2) Press and hold feed button until label printing.
- 3) After self test printed, wait 30sec wifi setting will print out.

Please restart the printer after print.